


Check Valves



Check Valve – C

These seat type valves allow free flow from port A to port B and give leak-proof closure in opposite direction. Available as inline mounting or Sub-plate mounting as per factory & ISO standards.

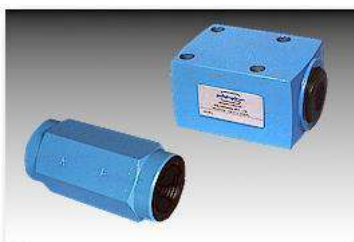

Check Valve - CI06

Seat type valves, Model CI with internal drain. Threaded or Sub-plate mounting construction. Available with two pilot piston size.

Pilot operated check valve (Modular) - CIM 10



These modular valves are available with the pilot operated check valve facility on either A or B or both A and B ports. The hydraulic opening operation for free flow in reverse direction is achieved by means of internal pilot pressure available from the other working port. To ensure proper closure of both valve poppets, both user connections should be unloaded when the control valve is in the neutral position by connecting with the return line.

Prefill valve (PV32 to PV80)

Intended for prefilling and exhausting of large hydraulic cylinders. Can be used as ant cavitation check valves. Decompression feature is optional up to size 80.

